

# CFM2-5

## FM BANDPASS FILTER

### FEATURES



- FM 5 kW bandpass filter
- 2 pole / 350 mm (13.8 in)
- adjustable selectivity



### ELECTRICAL DATA

TYPE	CFM2-5/DD
FREQUENCY RANGE	87.5 ÷ 108 MHz
IMPEDANCE	50 ohm
RETURN LOSS	≥32 dB at carrier fo
SELECTIVITY stop band atten. 20 dB	± 1.6 ÷ ± 2.0 MHz
MAX INPUT POWER	6 kW (selectivity ± 2.0 MHz) 5 kW (selectivity ± 1.6 MHz)
INSERTION LOSS	See table below
CONNECTORS	1-5/8" UnFLF
OPERATING TEMPERATURE RANGE	-10 to + 45°C (+14 to +113°F)
OVER TEMPERATURE*	typical 30 K at max input power
MATERIALS	Brass, aluminium, invar, iron, teflon
EXTERNAL FINISHING	Painted RAL 9005
WEIGHT (approx)	49 kg (108 lb)

\* referred to ambient temperature. Recommended: [AmbientTemp. + OverTemp.] ≤70°C (158°F)

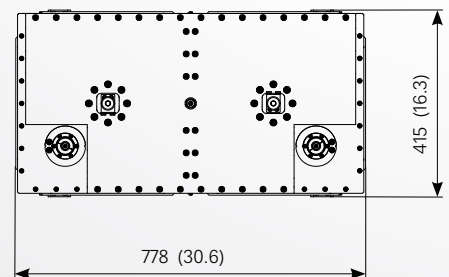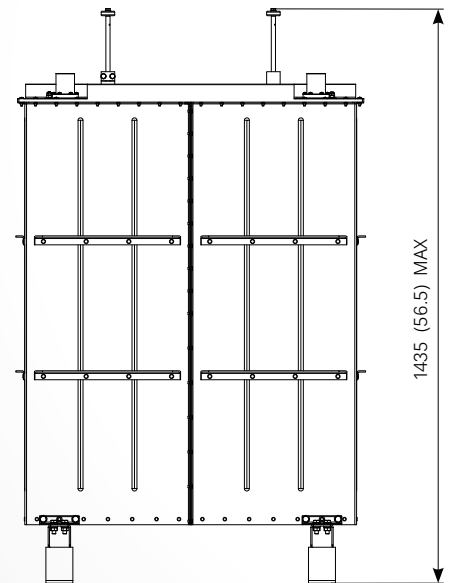

### INSERTION LOSS at carrier fo (dB)

FREQUENCY (MHz)		87.5	98	108
SELECTIVITY (MHz)	± 2.0	0.18	0.19	0.20
	± 1.6	0.21	0.22	0.23

All dimensions are in millimeters (inches)