

FM STAR TYPE COMBINERS – 1.2kW

FEATURES

- 2, 3 and 4 channel combiners
- 2 or 3 pole / 150 mm (5.9 in)
- temperature compensated
- adjustable selectivity

GENERAL FEATURES

FREQUENCY RANGE	87.5 ÷ 108 MHz
IMPEDANCE	50 ohm
VSWR	See table
MAX POWER	See table
CONNECTORS*	See table
WEIGHT	See table
OPERATING TEMPERATURE RANGE	-10 to + 45°C (+14 to +113°F)
OVER TEMPERATURE**	typical 30 K at max input power
ISOLATION	See table

* different connectors upon request

** referred to ambient temperature. Recommended: [AmbientTemp. + OverTemp.] ≤ 70°C (158°F)



ELECTRICAL AND MECHANICAL DATA


TYPE	FREQUENCIES SPACING (MHz)	MAX POWER PER CHANNEL (kW)	V.S.W.R INPUT at fo	ISOLATION BETWEEN FREQ. (dB)	INSERTION LOSSES at fo (dB)	CONNECTORS* INPUTS / OUTPUT	WEIGHT (approx) kg (lb)
DPLX UC/FM/ST2-1.2	≥ 3.0	1.2	≤ 1.08	≥ 30	≤ 0.50	7/8" EIA / 7/8" EIA	33 (73)
	≥ 2.0	1.2	≤ 1.08	≥ 30	≤ 0.58		
DPLX UC/FM/ST3-1.2	≥ 2.0	1.2	≤ 1.08	≥ 30	≤ 0.55	7/8" EIA / 7/8" EIA	45 (99)
	≥ 1.6	1.2	≤ 1.08	≥ 30	≤ 0.68		
	≥ 1.2	0.8	≤ 1.08	≥ 30	≤ 0.92		
TPLX UC/FM/ST2-1.2	≥ 3.0	1.2	≤ 1.08	≥ 30	≤ 0.55	7/8" EIA / 7/8" EIA	50 (110)
	≥ 2.0	1.2	≤ 1.08	≥ 30	≤ 0.63		
TPLX UC/FM/ST3-1.2	≥ 2.0	1.2	≤ 1.08	≥ 30	≤ 0.60	7/8" EIA / 7/8" EIA	70 (154)
	≥ 1.6	1.2	≤ 1.08	≥ 30	≤ 0.73		
	≥ 1.2	0.8	≤ 1.08	≥ 30	≤ 0.97		
QPLX UC/FM/ST2-1.2	≥ 3.0	1.2	≤ 1.08	≥ 30	≤ 0.60	7/8" EIA / 7/8" EIA	65 (143)
	≥ 2.0	1.2	≤ 1.08	≥ 30	≤ 0.68		
QPLX UC/FM/ST3-1.2	≥ 2.0	1.2	≤ 1.08	≥ 30	≤ 0.65	7/8" EIA / 7/8" EIA	86 (190)
	≥ 1.6	1.2	≤ 1.08	≥ 30	≤ 0.78		
	≥ 1.2	0.8	≤ 1.08	≥ 30	≤ 1.02		

* different connectors upon request


FM STAR TYPE COMBINERS – 1.2kW

MECHANICAL LAYOUT


DPLX UC/FM/ST2 – 1.2

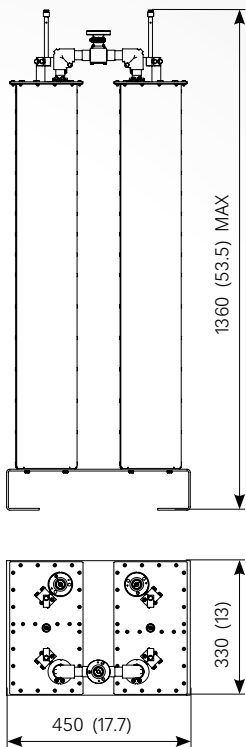


TPLX UC/FM/ST2 – 1.2

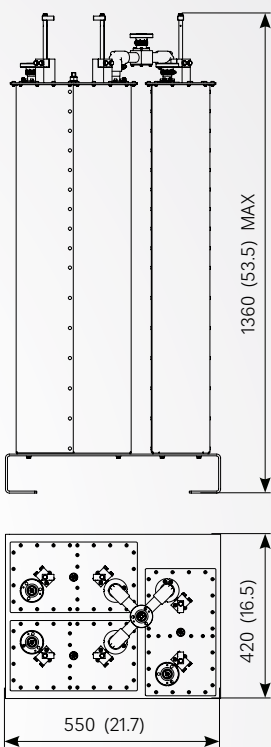


QPLX UC/FM/ST2 – 1.2

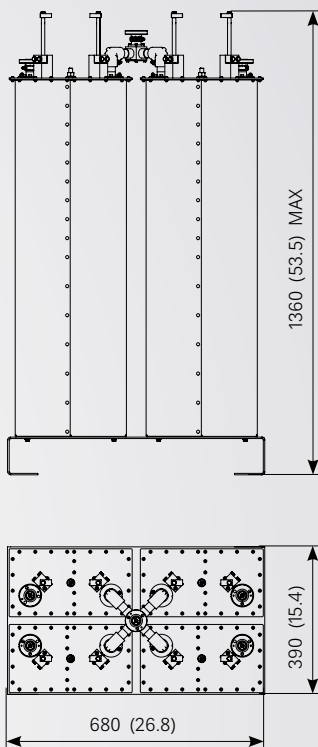


DPLX UC/FM/ST3 – 1.2

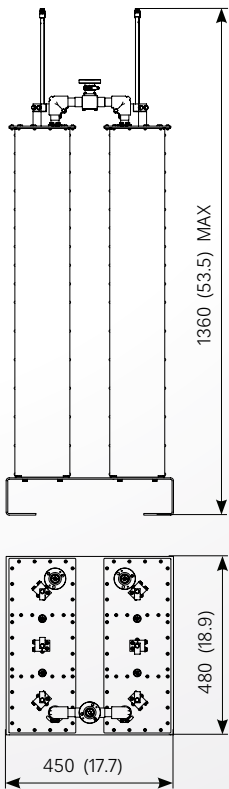

TPLX UC/FM/ST3 – 1.2

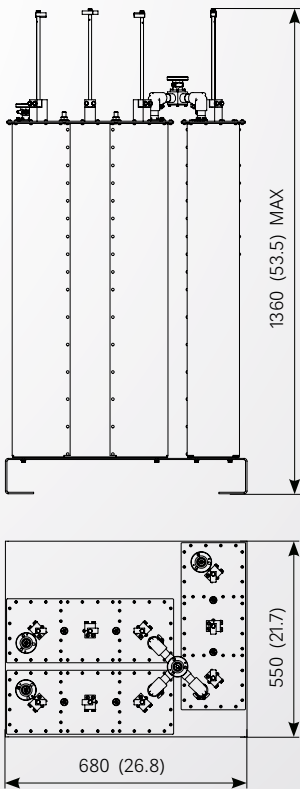

QPLX UC/FM/ST3 – 1.2

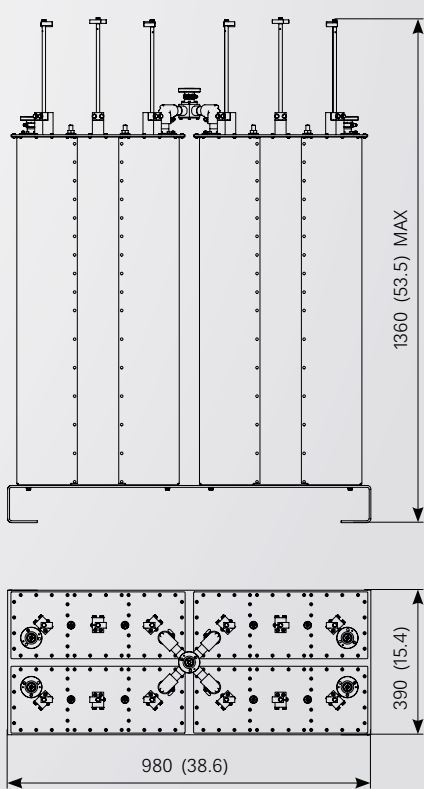

All dimensions are in millimeters (inches)