

FREQUENCY EQUALIZED DIRECTIONAL COUPLERS


FEATURES

- unflanged type
- low V.S.W.R and insertion losses
- only for indoor applications

GENERAL FEATURES

FREQUENCY RANGE	FM band 87.5 ÷ 108 MHz (EF)
IMPEDANCE	50 ohm
RETURN LOSS	≥ 30 dB
COUPLING FACTOR	See table below
DIRECTIVITY	≥ 30 dB
FLATNESS	≤ ±0.15 dB
MAX MEAN POWER	See table below
OPERATING TEMPERATURE RANGE	-10 to +45° C (+14 to +113° F)
CONNECTORS	See table below
PROBE CONNECTORS	SMA F
WEIGHT	See table below
WATERPROOF	No
MATERIALS	- External body Aluminium - Inner conductor Silver plated brass, silver plated aluminium - Insulator Teflon, rexolite
EXTERNAL FINISHING	Surtec 650


MAX MEAN POWER

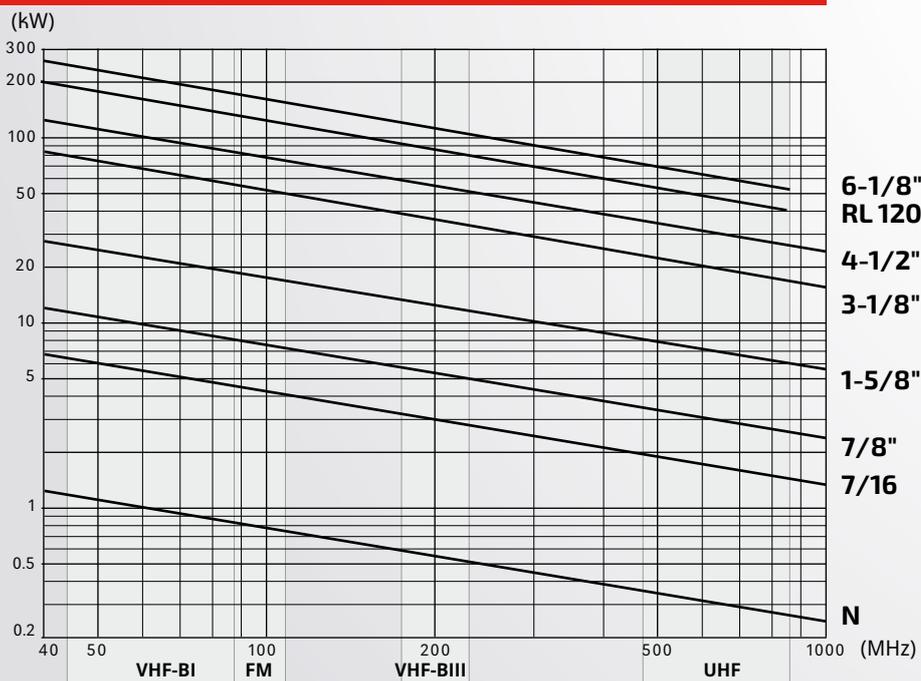

STANDARD CONDITIONS:

- V.S.W.R. = 1.0
- Ambient temperature 40°C (104°F)
- Atmospheric Pressure, dry air
- Inner Conductor Temperature 120°C (248°F)

FREQUENCY EQUALIZED DIRECTIONAL COUPLERS

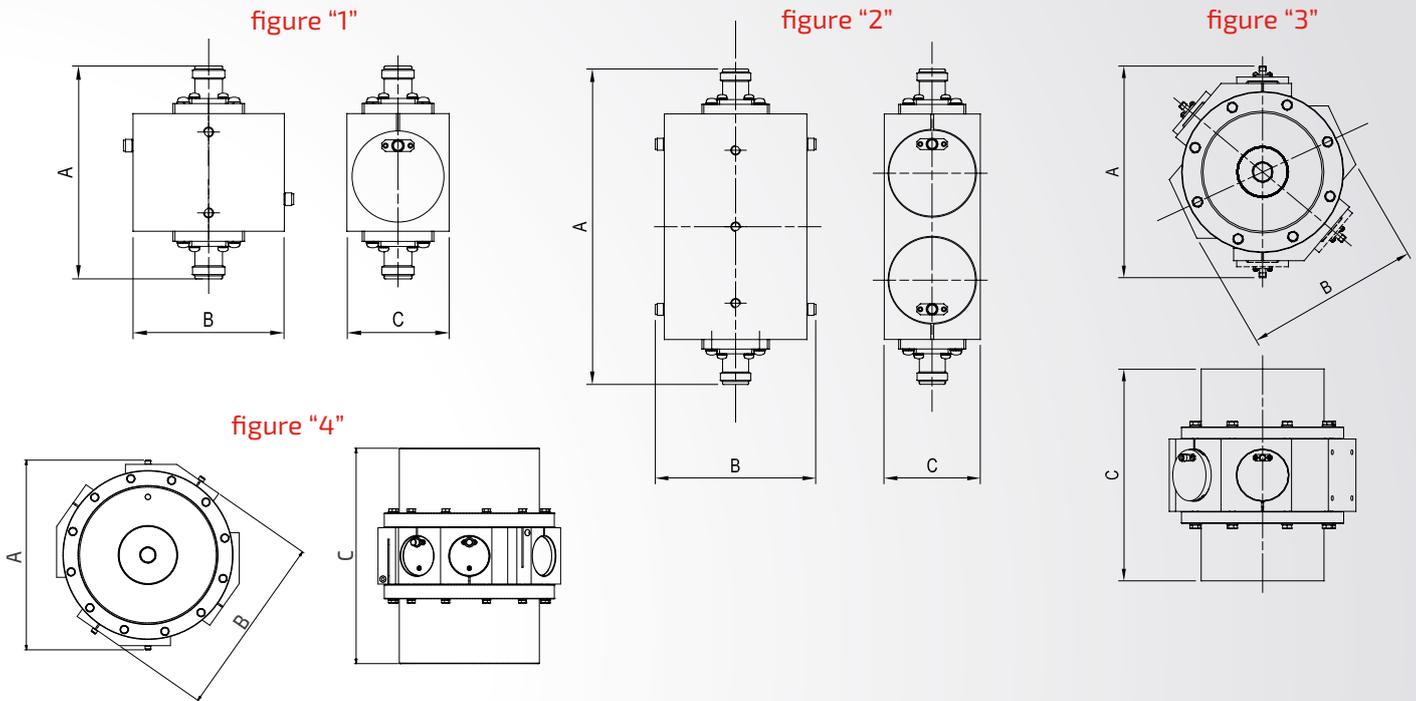

FM BAND

TYPE	CONNECTORS	Nr PROBES	FIGURE	DIMENSIONS mm (in)			WEIGHT Kg (lb) (max)	COUPLING FACTOR (dB) min/max
				A	B	C		
ADR-01/EF/2/AA	NF - NF	2	1	105 (4.1)	104 (4.1)	50 (2)	0.60 (1.3)	-50/-70
ADR-01/EF/2/AA1	NF - NM	2	1	123 (4.8)	104 (4.1)	50 (2)	0.65 (1.4)	-50/-70
ADR-01/EF/2/BB	7/16 F - 7/16 F	2	1	102 (4)	104 (4.1)	50 (2)	0.68 (1.5)	-50/-70
ADR-01/EF/2/BB1	7/16 F - 7/16 M	2	1	111 (4.4)	104 (4.1)	50 (2)	0.72 (1.6)	-50/-70
ADR-01/EF/2/CC/Z	7/8" Unfl F - 7/8" Unfl F	2	1	138 (5.4)	104 (4.1)	50 (2)	0.59 (1.3)	-50/-70
ADR-02/EF/2/DD/Z	1-5/8" Unfl F - 1-5/8" Unfl F	2	1	170 (6.7)	119.5 (4.7)	60 (2.4)	0.93 (2.1)	-55/-75
ADR-03/EF/2/EE/Z	3-1/8" Unfl F - 3-1/8" Unfl F	2	3	155 (6.1)	110 (4.3)	177.4 (7)	2.37 (5.2)	-60/-80
ADR-04/EF/2/FF/Z	4-1/2" Unfl F - 4-1/2" Unfl F	2	3	184 (7.2)	151.5 (6)	184 (7.2)	2.90 (6.4)	-65/-85
ADR-06/EF/2/GG/Z	6-1/8" Unfl F - 6-1/8" Unfl F	2	4	217 (8.5)	203 (8)	241 (9.5)	5.5 (12)	-70/-90

Note: F = female / M = male